


ACOUSTIC DECK

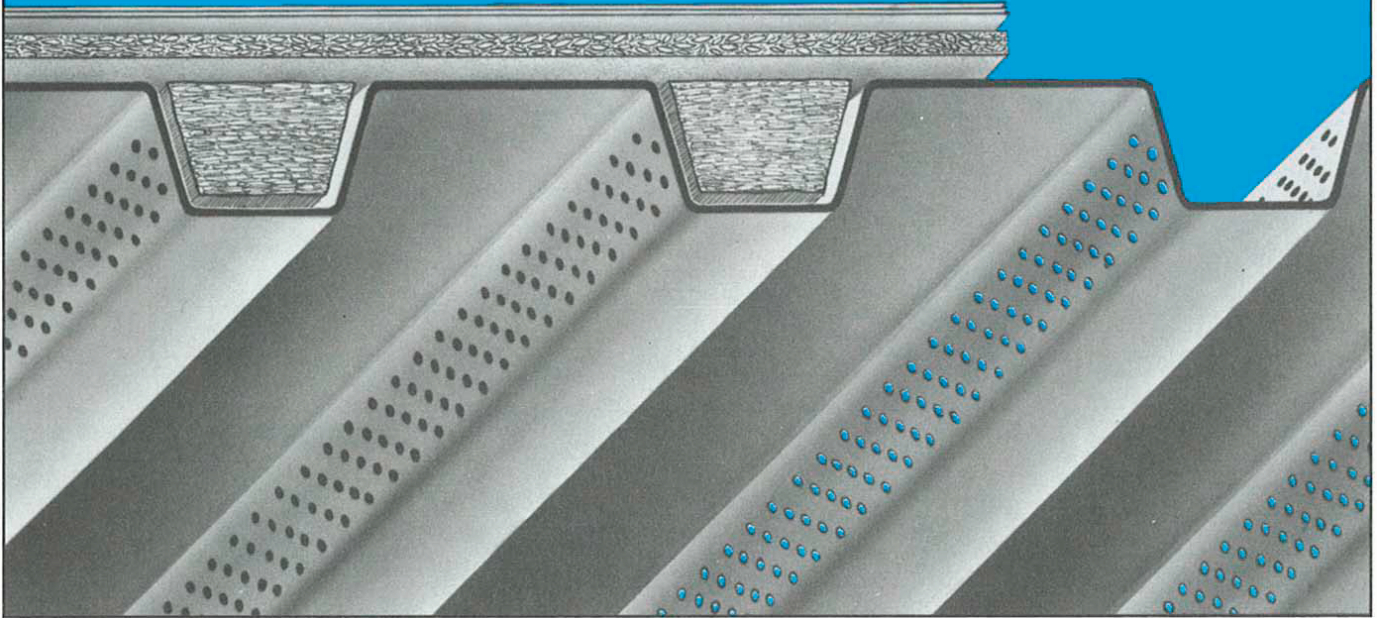

AVAILABILITY: Profiles: S-15, S-30-8

MATERIAL: 22 ga. (.030"/.76mm) to 16 ga. (.061"/1.55mm) light zinc coated, galvanized and pre-painted steel with 1/8" (3.18mm) diameter perforations on 3/8" (9.53mm) staggered centers.

LOADINGS: Acoustic profiles will carry 10% less uniformly distributed load than the same profiles without perforations. (See load tables for unperforated profiles.)

APPLICATIONS: Factories, offices, community buildings, schools, gymnasiums and auditoriums. Also beneficial when used as a stay in place concrete form for slab venting.

ADVANTAGES:

1. Low cost compared to other acoustical treatments.
2. Standard decks may be mixed with acoustic decks for economy.
3. Easy to maintain.
4. High coefficient of sound-absorption.



a division of **STAMMUEL**
www.rollformgroup.com

SUITE 100 - 6701 FINANCIAL DRIVE
MISSISSAUGA, ON L5N 7J7
PHONE: (905)270-5300
TOLL FREE: 1-800-233-6228
FAX: (905)593-3489

1709 - 8 STREET,
NISKU, AL CANADA T9E 7S8
PHONE: (780)955-3317
TOLL FREE: 1-877-955-6340
FAX: (780)955-3318

